


TE1028V Multiple thermocouple circuit panel, vertical

Application	
Female multi panel	Thermocouple and RTD circuits
Contacts	Springloaded thermocouple contacts
Materials	Glass filled thermocouple body with original thermocouple material contacts
Front	Aluminium anodized for full corrosion protection
Temperature rating	
Temperature limit	Maximum 200°C
Construction	
Body	Glass filled thermoplastic material
Design	Stainless steel bracket mounted with 2 screws
Molded barriers	Prevent short circuit
Identified	Scratchproof numbering
Wire size	
Accepts wires	From 0.2 mm to 2.0 mm
Colour code	According thermocouple calibration



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

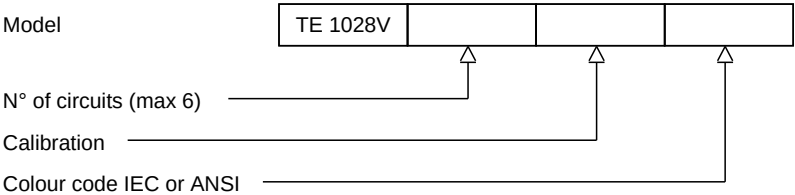

H9-2 Rev. 0 07/07