


ME 1067 Mineral insulated thermocouple with silicone cable

Sheath	
Construction	Mineral insulated
Material	SS 316 - (Wst 1.4401) Also available in SS310, Inconel 600, Hasteloy X and Nicrosil D
Insulation	MgO
Diameter	Customer to specify
Length	Customer to specify
Extension cable	
	Silicone insulated flexible thermocouple cable, up to 230°C
Length	Customer to specify
Thermocouple	
Calibration	K, T, J, E, N, U or L
For duplex	KK, TT, JJ, EE, NN, UU or LL
Accuracy	According IEC 60584
Hot junction	Insulated
Testing	Tested 500 Volt @ 20 °C
Insulation resistance	Minimum 100 M ohm
Available diameter	(0.25 - 0.5 - 1.0)* 1.5 - 2.0 - 3.0 - 4.5 6.0 and 8.0 mm. Other diameters possible * single only

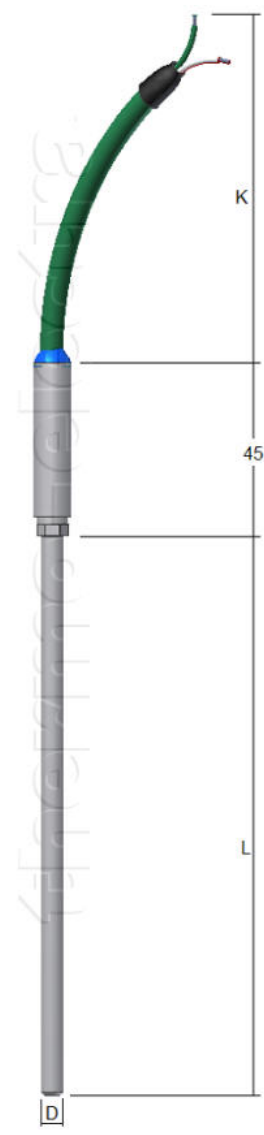

Ordering code	
*This datasheet is purely indicative, build-up of model code may vary from this datasheet.	
Model	ME 1067
Calibration	
Diameter "D" in mm	
Length "L" in mm	
Length "K" in mm	