

FFA LEMO Plug



Application

Application	Laboratory, R&D, Aviation and other high demanding environments
Snap action	Ideal for quick disconnection near to the sensor
Materials	Housing: Nickel plated Brass 2 or 4 Soldering contacts, Gold plated Brass. Insulation: PEEK
Temperature rating	Maximum temperature 260°C

Style / Connection


Snap action	LEMO-Connector snap action system
Connector size	
Size:	0 for cable diameter max. 3,7 mm.Lxd 34,5x9mm 1 for cable diameter max. 3,7 mm.Lxd:42,5x12mm 2 for cable diameter max. 4,2 mm.Lxd:52x15mm 3 for cable diameter max. 6,2 mm.Lxd:59x18mm

Options

Environmental	Watertight versions
Contact	Multiple contact connectors
Materials	Other contact materials possible

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

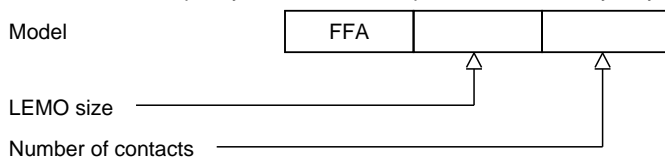

H9-1 Rev.0 7/07