

TF 5800 Adjustable bayonet thermocouple

Construction

Insertion length	Springloaded
Diameter	6.0mm standard, other diameters possible
Bayonet	Diameter 12.2 mm, one slot
Spring	Length 200 mm

Extension cable

	FEP/PFA insulated thermocouple cable with steel wire braiding
Length	3000mm standard, other lengths possible

Thermocouple

Calibration	K, J or L
For duplex	KK, JJ or LL
Accuracy	According IEC 60584 / DIN 43710
Temperature	400°C maximum
Hot junction	Grounded


Bayonet adaptor

Model C6	Process connection M12 x 1.75 Please order seperately
-----------------	--



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

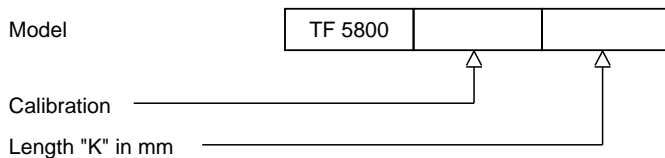

H5-1 Rev. 07/07