

# TF 5860 Plastic melt thermocouple adjustable length

## Insertion length


<b>Tip</b>	Adjustable insertion length
<b>Barrel</b>	Drilled SS 316 - ( Wst 1.4401 ) standard, other materials possible
<b>Construction</b>	Element replaceable. optional welded or vacuum brazed
<b>Length</b>	75mm standard, other lengths possible
<b>Process connection</b>	1/2"-20UNF standard, other threads possible
<b>Drawing</b>	Detail drawing available

## Thermocouple

<b>Calibration</b>	J, K or L
<b>For duplex</b>	JJ, KK or LL
<b>Accuracy</b>	According IEC 60584
<b>Hot junction</b>	Grounded


## Extensioncable

	Teflon insulated flexible extension cable with stainless steel flexible hose, up to 240°C
<b>Length</b>	Customer to specify
<b>Style / Connection</b>	2 pole thermocouple plug model TE 1060

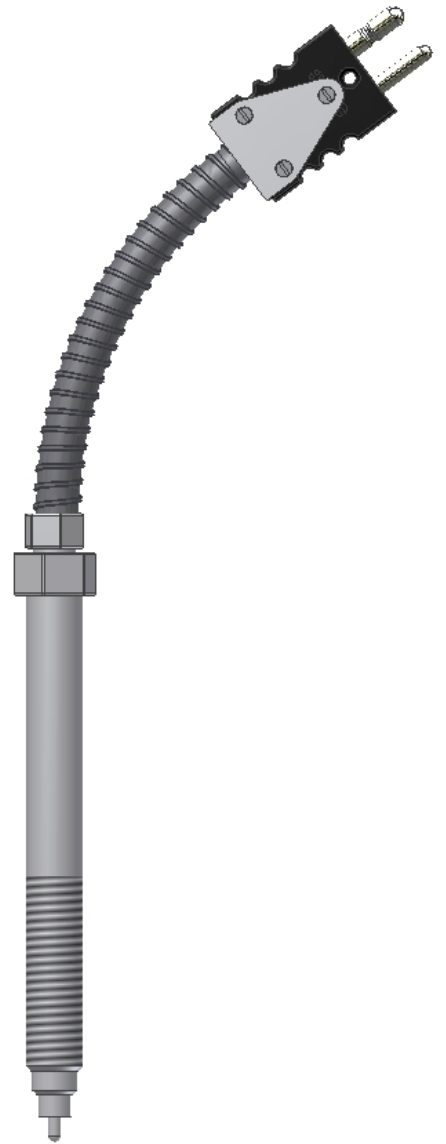

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

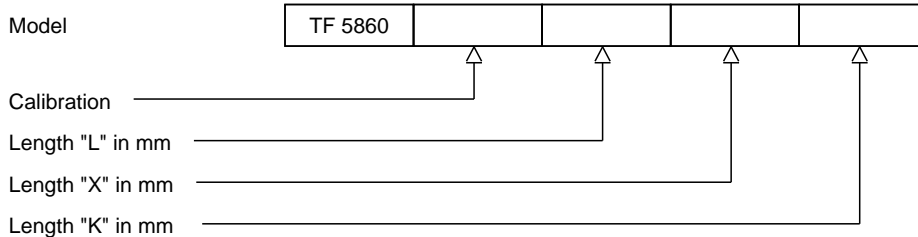

H5-1 Rev. 07/07