

# DWR 6060 Bearing resistance thermometer

## Design

Designed for use on ships

## Type Approval

LLoyds Register Marine

## Category

LV2000 range

## Sheath

### Construction

Mineral insulated

### Material

SS 316 - ( Wst 1.4401 ) standard, other materials possible

### Diameter

3.0mm standard, other diameters possible

### Length

Customer to specify

### Process connection

2 compression glands 1/4"BSP (G1/4") standard, other threads possible

## Cable

Silicon insulated flexible cable, 240°C

### Cable length

Customer to specify

## Sensor

Single Pt100

### Accuracy

According IEC 60751 class B

### Style / Connection

3-wire system standard, 4-wire system optional

### Range


-100 / +250°C

### Testing

Tested 200 Volt @ 20°C


### Insulation

Minimum 100 M ohm

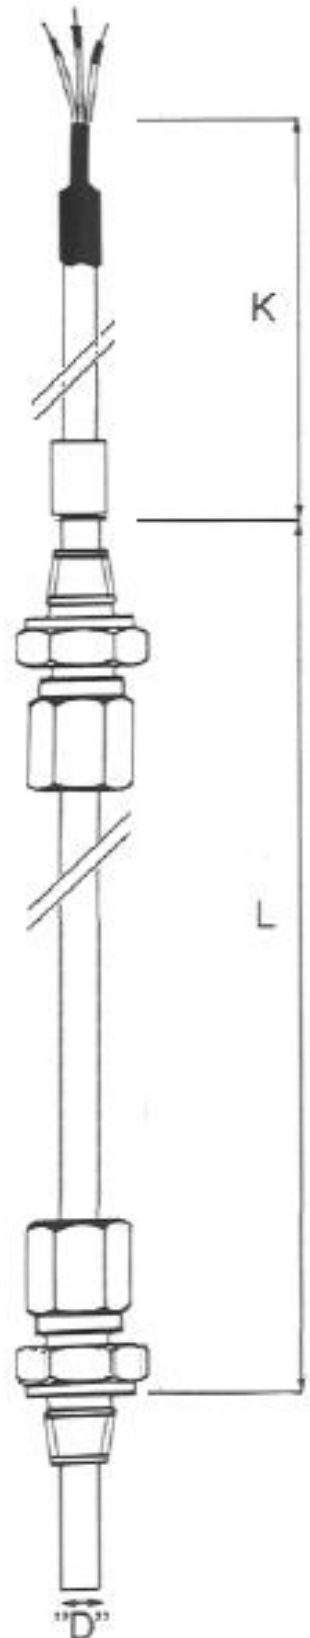

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

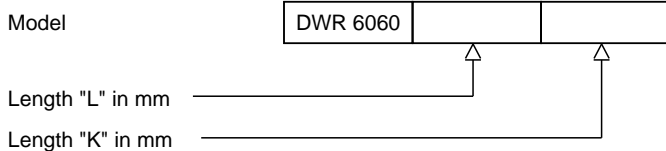

H6-1 Rev. 07/07