


DWR 6040 Vibration proof resistance thermometer

Design	Designed for use on combustion engines
Protection tube	
Construction	Closed-end tube
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Insertion length	150mm standard, other lengths possible
Diameter	12mm tapered to 8.0mm standard, other diameters possible
Process connection	1/2"BSP (1/2"), 1/2"NPT or other threads possible
Lead wire	
	Heat and oil resistant armoured extension cable 250 °C
Lead wire length	1000mm standard, other lengths possible
Sensor	
	Single or Duplex Pt100
Style / Connection	3-wire system standard, 4-wire system optional
Accuracy	According IEC 60751 class B
Testing	Tested 200 Volt @ 20°C
Insulation	Minimum 100 M ohm
Design	Vibrationproof
Temperature	600°C maximum



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

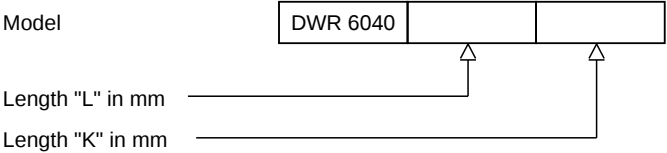

H6-1 Rev.07/07