

E30 Twisted PVC thermocouple extension cable -30°C to 85°C

Specifications

Insulation material	High quality extruded PVC
Temperature limits	-30 / +85 °C
Moisture resistance	Good

Conductors

Conductor type	Stranded, twisted pair
Conductor size	0.5mm ² (16x0.2mm), 1.5mm ² (48x0.2mm)
Outer diameter	0.5mm ² each wire 1.6mm, 1.5mm ² , each wire 2.8mm

Calibration

Thermocouple type	K, T, J, E, U, L, N, B, R or S
Limits of error	Conforms to IEC 60584 and ANSI MC 96.1
Colourcode	According thermocouple calibration IEC, ANSI, BS etc.

Applications

Cabinet and instrumentation circuit wiring
Industrial and general purpose applications


Dimensions

Wire size 0.5mm ²	+/- 2.0x1.6mm
Wire size 1.5mm ²	+/- 2.0x2.8mm



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

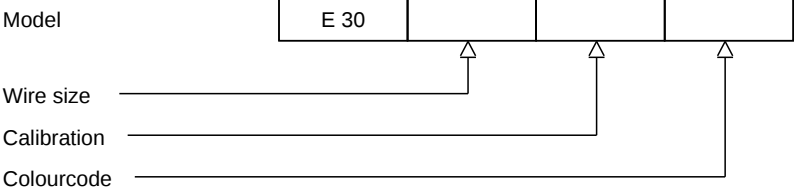

H8-1 Rev. 07/07