

C 50 Instrument Cable, with Electrical Screen and Armour

Insulation material


	Each wire high quality extruded
Please specify	P : for PVCPE : for Polyethylene
Inner Jacket	High quality extruded PVC or PE
Electrical screen	Two layers of aluminium mylar tape with tinned copper earth wire 7 x 0.25 mm
Armour	Served steel wires, 0.9 mm minimum, with counter steel band
Outer jacket	High quality extruded PVC
Shape	Round
Moisture resistance	Good
Flame resistance	Good
Temperature limits	PVC : -30 / +105 ° CPE : -30 / +70 ° C

Conductors

	Stranded copper
Conductor size	1.3 mm ² , 7 x 0.5 mm (16 Awg)
Number of pairs or triad	1
Construction	Twisted, ± 20 times per meter
Identification	P : pair ; Black and whiteT : triad ; Black, white and red
Jacket colour	Black or blue
Please specify	

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

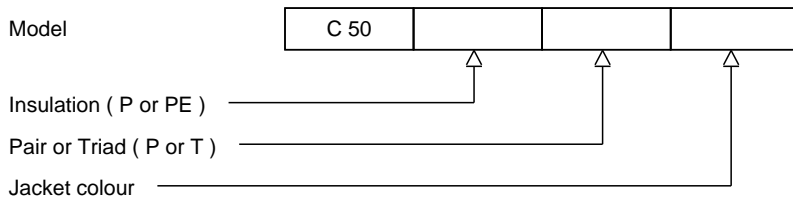

H8-1 Rev. 07/07