

C 71 Multicore Instrument Cable, With Electrical Screen And Armour

Insulation material


	Each wire inner and overall jacket high quality extruded
Please specify	P : for PVCPE : for Polyethylene
Individual shield	Aluminium mylar tape, 100% coverage Earthwire 0.6 mm. tinned copper
Overall shield	Aluminium mylar tape, 100% coverage Earthwire tinned copper 0.8 mm. solid (C) or stranded 7 x 0.31 mm. / 0.5 mm ² (D)
Armour	Served steel wires, 0.9 mm minimum, with counter steel band
Outer jacket	High quality extruded PVC
Shape	Round
Moisture resistance	Good
Flame resistance	Good
Temperature limits	PVC : -30 / +105 ° CPE : -30 / +70 ° C

Conductors

	Stranded copper
Conductor size	0.51 mm ² , 7 x 0.3 mm (20 Awg)
Number of pairs	2, 4, 6, 10, 12, 16, 20, 24, 36 or 48
Number of triads	2, 3, 4, 6, 8, 10, 12, 20 or 24
Construction	Twisted, ± 20 times per meter
Identification	Pair or Triad (P or T), numbered Triad : Black, white and red, numbered
Jacket colour	Black or Blue
Please specify	

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

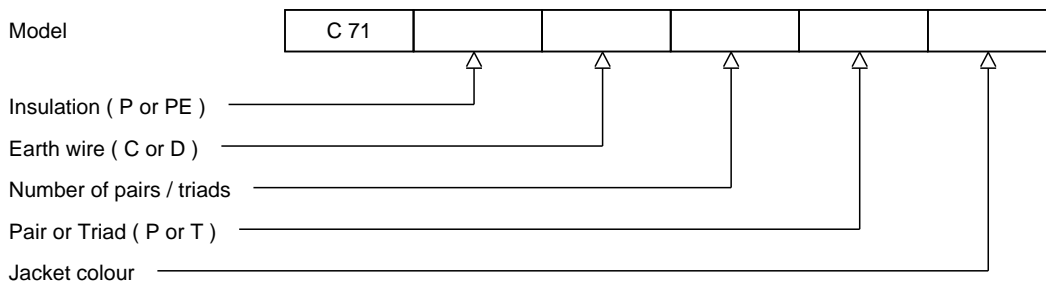

H8-1 Rev. 07/07