

FF 3090 Thermowell for cover flange

Thermowell

Design	Drilled bar stock for cover flange mounting Made from one piece bar, forging, or bar with welded flange
Materials	SS 316 - (Wst 1.4401) standard

Stem / Shaft

Diameter	20 mm straight or a reduced tip (L=78mm x d=12 mm)
Bore	Stepped 8.0mm to 6.5 mm at the tip side
Bottom thickness	5.0 mm
Flange facing	Flat Face Serrated to ASME B16.5

Cover flange


Separate available	To specify
Pipe class	DN25, DN40 or DN50
Class	150, 300, 600, 900/1500 and 2500Lbs

Dimensions

Insertion length	To specify
Flange size	51mm (DN25), 73mm (DN40) or 92mm (DN50),To specify

Options

Other materials and dimensions
Fully machined from bar, no weldings
Knurled tip
Protective coating, PTFE, Halar, Stellite etc.
Tagging
Wake frequency calculation

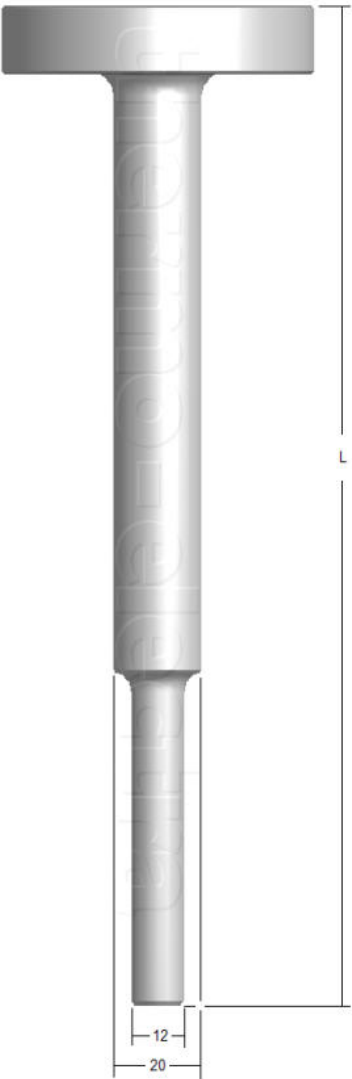

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	FF 3090					
Flange size						
"L" length in mm						
Straight or stepped						
Material						
Options						

H3-1 Rev.0 7/07