

# TE1210 Mini jack

## Application

<b>Connector</b>	Thermocouple and RTD circuits
<b>Design</b>	Suited for small wires and mineral insulated cables
<b>Materials</b>	Glass filled thermoplastic body with original thermocouple material contacts

## Temperature rating


<b>Temperature limit</b>	Maximum 200°C
--------------------------	---------------

## Construction

<b>Body</b>	Glass filled thermoplastic material
<b>Design</b>	Rugged one body design
<b>Molded barriers</b>	Prevent short circuit


## Wire size

<b>Accepts wires</b>	From 0,002 mm to 0,6 mm
<b>Cable jacket diameter</b>	Maximum 4,5 mm.



## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

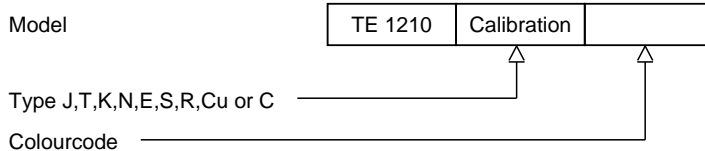

H9-1 Rev.0 7/07