


TE1010C Standard jack ceramic up to 650°C



Application

Connector	Thermocouple and RTD circuits
Contacts	Ensuring good contact even in demanding applications
Materials	Ceramic with original thermocouple material contacts

Temperature rating

Temperature limit	Maximum 650°C
--------------------------	---------------

Construction

Body	High purity alumina body material
Design	Cover with crews for quick wiring
Molded barriers	Prevent short circuit

Wire size


Accepts wires	from 0,2 mm. to 2,0 mm.
Cable diameter	Maximum 8,0 mm.

Color code

Available colors	White only, thermocouple calibration by color dot
-------------------------	--

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

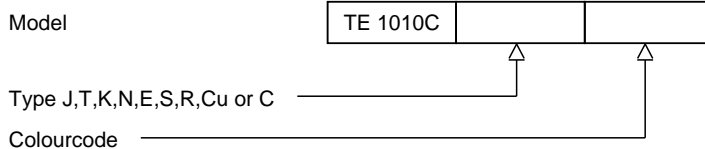

H9-1 Rev.0 7/07