


TE1091 Strain relief for connectors


Application

| | |
|----------------------------|---|
| Application | A set wire inserts fitted in the entrance hole of the connector will provide a very good strain relief without any protruding parts from the connector. |
| Connector | Fits miniature or standard connector |
| Temperature rating | |
| Temperature limit | Maximum 120°C |
| Material | |
| Material | Thermoplastic material with a round or oval hole to fit around a specific wire. |
| Diameter ID | |
| Miniature connector | Round 1.0mm, 3.5mm or oval 2.0x1.5mm |
| Standard connector | 3,5mm round or oval 2.0x1.5mm |
| Mounting | Top and bottom part for easy mounting over the wire |
| Ordering | Specify M for mini or S for standard, and the hole diameter |



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

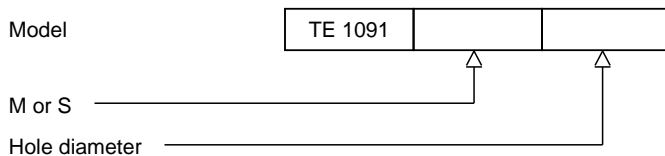

H9-1 Rev.0 7/07