

# PCA LEMO Jack



## Application

<b>Application</b>	Laboratory, R&D, Aviation and other high demanding environments.
<b>Snap action</b>	Ideal for quick disconnection of the sensor
<b>Materials</b>	Housing: Nickel plated Brass2 or 4 Soldering contacts, Gold plated Brass.Insulation: PEEK
<b>Temperature rating</b>	Maximum temperature 260°C.

## Style / Connection

<b>Snap action</b>	LEMO-Connector snap action system
--------------------	-----------------------------------

## Connector size


<b>Size:</b>	0 for cable diameter max. 3,7 mm.Lxd 34,5x9mm1 for cable diameter max. 3,7 mm.Lxd:42,5x12mm2 for cable diameter max. 4,2 mm.Lxd:52x15mm3 for cable diameter max. 6,2 mm.Lxd:59x18mm
--------------	---

## Options

<b>Environmental</b>	Watertight versions
<b>Contact</b>	Multiple contact receptacles
<b>Materials</b>	Other contact materials possible

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

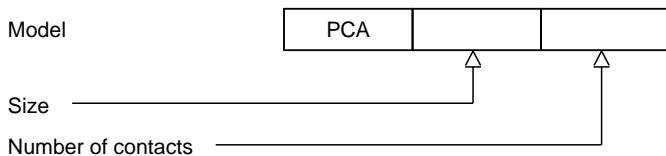

H9-1 Rev.0 7/07