

BE 1091 Pipe clamp thermocouple

Housing

Construction	Adjustable stainless steel band
Material	Brass contact block, 8 x 8 x 30 mm
Optional	Other block material
Diameter "D"	Customer to specify

Extension cable


Transition	Moisture resistant cable seal
Ingress protection	IP65 / IEC529
Cable	FEP/PFA insulated flexible thermocouple cable with stainless steelbraiding 220°C
Cable length "K"	Customer to specify

Thermocouple

Calibration	K, T, J, E, N, U or L
Accuracy	According IEC 584-1 / DIN 43710
For duplex	KK, TT, JJ, EE, NN, UU or LL
Hot junction	Insulated
Insulation test	Tested with 500 Vdc @ 20 °C
Insulation resistance	Minimum 100 M ohm


Options

Length	Other length possible
Diameter	Other diameter possible
Cable type	Other cable type possible

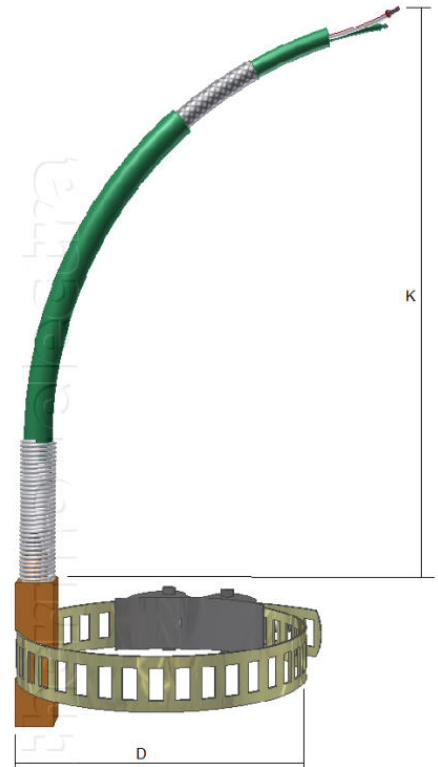

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

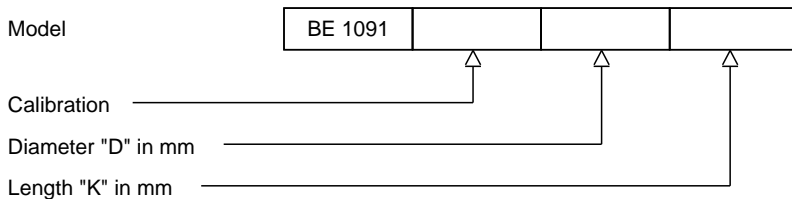

H1-1 Rev.0 7/07