


ME 7096 Surface resistance thermometer for 2" pipe

Sheath	
Construction	Mineral insulated (MgO)
Material	SS316 standard
Diameter	6.0 mm standard
Connection head	
Model	1088
Material	SS316
Cable entry	M20 x 1.5
Measuring insert	
Type	MI 2025
Construction	Replaceable
Sensor	
Sensor type	Single Pt 100: "S" Duplex Pt 100: "D"
Accuracy	According IEC 751 class B
Style / Connection	3 wire system (Optional 4 wire system)
Range	-220 / +600°C
Options	
Transmitter	4-20mA In-Head Transmitter, standard or ATEX Explosion proof. Please select from our standard range, see "transmitter" chapter, specify make, model and range
Swing-Cover head	DAN. Transmitter direct mounted on measuring insert
High Swing-Cover head	DAN-H. Transmitter in cover. Insert with ceramic block

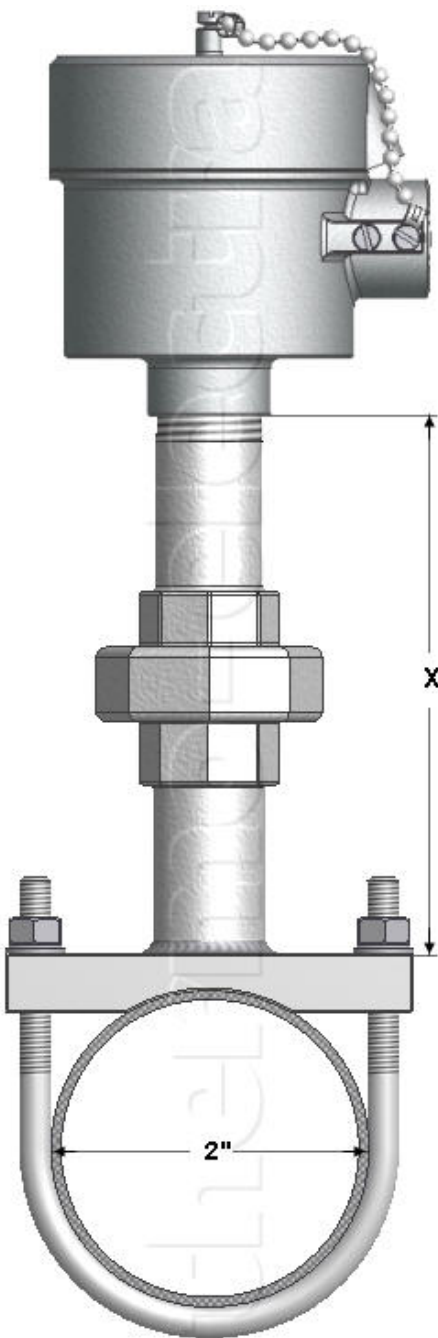

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	ME 7096		
Sensor (S or D)		↑	↑
Length "X" in mm			↑