

ME 2060 General purpose resistance thermometer with flying leads

Sheath

Construction	Mineral insulated
Material	SS 316 - (Wst 1.4401) standard, other materials possible
Insulation	MgO
Diameter	3 or 6 mm, customer to specify
Length	Customer to specify

Lead wire

Transition	Stainless steel sealpot with epoxy resin seal, moisture resistant
Ingress protection	IP65 / IEC 529
Flying leads	PVC (90°C) insulated flexible copper wire
Length	Customer to specify


Sensor

	Single or Duplex Pt100
Accuracy	According IEC 60751 Cl. B, A or AA
Style / Connection	3-wire system standard, 4-wire system optional
Range	Standard -20 / +400°C, optional -220 / +600°C
Insulation test	Tested with 500 Volt @ 20°C
Insulation resistance	Minimum 100Mohm



Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

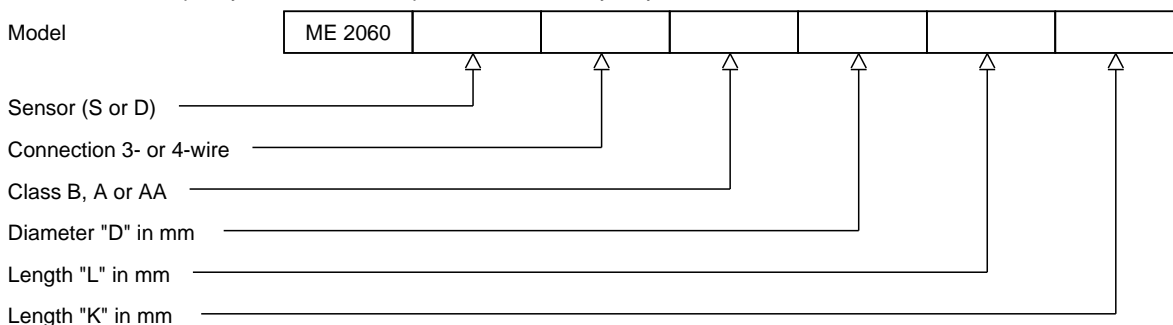

H2-1 Rev.0 7/07